## Invacare Top End Force G Handcycle - UK Price List Order Form

☐ Please indicate your choice with a cross in this square

O Indicate that this option has no upcharge

For accuracy of ordering, please fax order to Invacare Customer Service on 01656 776220 or e-mail to: ordersuk@invacare.com

### www.topendwheelchair.com

Provider name:	Account number:
PO number:	-
	Fax number:
Address:	
Customer name:	
Address:	





DATE:			
	QUOTE		
	ORDER		


Manual Sport Wheelchair July 2013


	Item	Description	Comments and/or non compatibilities information	Price
	FRCG	Top End Force G Handcycle	Trunk powered position	£3,500
	FRCG5	Force G Handcycle less front and rear wheels		£3,348
	SEATING OPTIONS			
	Seat width			
		Seat width 14"		O
		Seat width 15"		O
		Seat width 16"		O
		Seat width 17"		O
		Seat width 18"		0
	Wheel base			
	Standard	Wheelbase 60"	Recommended for users taller than 5'6"	0
		Wheelbase 57"		O
	CUSTOMER DETAIL	S		
		Height:		0
		Weight:		O
		<u>Disability</u> :		O
	COMPONENTS CHO	DICES: SHIFTER / BRAKE / FRONT WHEEL DERAILLEUR /	CASSETTES PACKAGES	•
	Shifter / Brake / Fr	ont wheel derailleur packages		
_	G. 1 1	Rapid-fire® brake / shifter with		
ш	Standard	Shimano® XT Derailleur, KMC® chain		0
		SRAM® grip shifter, Avid component brake lever		
_		and SRAM® X.O. Derailleur /	Grip shift is operated by rotating the grip mounted on either the	
П	XLT53	·	right or left handle. Super light. Shifts quickly and accurately.	£386
		SRAM hollow pin chain	Preferred by most Team Invacare / Top End athletes.	
		SRAM® trigger shifter, Avid component brake lever	Thumb and forefinger operated. Super light weight, high quality	
	XLT54	and SRAM® X.O. Derailleur /	components. A great choice for those who want low weight and do	£441
		SRAM hollow pin chain	not like the grip shift.	
	Mounting position	: Shifter / Brake Lever	1 W	1
	Standard	Right handle		0
		Left handle		Ō
	BRAKE CHOICE (inc	ludes brake and parking brake)		
	Standard	Caliper-Cane Creek® SCR-3		0
	XLT55	Caliper-Cane Creek® SL with titanium hardware	Ultra light, with titanium nuts and bolts	£105
	XLT66	Disc brake	Only available with standard and Corima carbon wheel	£193
_	FRONT WHEEL CAS			
	Standard	SRAM® 11-34		0
	XLT58	SRAM® 11-23	Cassettes with closer gear ratios. Not best for hilly terrain.	£34
	XLT59	SRAM® 11-26	Cassettes with closer gear ratios. Not best for hilly terrain.	£34
		E (operated by crank mounted shifter)	The second secon	
	Standard	48-39-24		0
	XLT41	Chain ring option 53-39-28		£68
	XLT47	Rotor® Q-Ring option 53-39-28	28 chain will not be Q-ring	£391
		See measurement guidelines on Page 3)		
			isely fit the hand. The bearing which allow the pedal to rotate	
		located in the crank set and not in the pedal, which m		
П	Standard	Medium handpedal size (1 ¾")	ancs this pedal very connortable.	0
	XLT72	Small handpedal size (1 ½")		
	XLT73	Large handpedal size (2 ¼")		£52
	<b></b>		Flot aluminium plates wolded at the level and of the model	£52
	XLT56	Power plate upgrade	Flat aluminium plates welded at the lower end of the pedal	£34


	CRANK ARMS: TAPE	RED CRANK (choose length and width combination)			
	(See measurement guidelines on Page 3)				
	V cranks				
		Length 180 mm x Width 20" (approx. 508 mm)	Length is measured perpendicular from the centre of the crank to	0	
		Length 190 mm x Width 20" (approx. 508 mm)	the centre of the hand pedal spindle.	0	
	S cranks	<b>3</b>			
		Length 200 mm x Width 22" (approx. 559 mm)	The width is measured horizontally centre to centre to the point at	0	
		Length 210 mm x Width 22" (approx. 559 mm)	the middle of the hand pedal.	0	
		Length 200 mm x Width 24" (approx. 610 mm)	the finade of the fland pedal.	0	
		Length 210 mm x Width 24" (approx. 610 mm)		0	
_	Extra crank arms	tength 210 mm x width 24 (approx. 010 mm)			
	LACIA CIAIIK AIIIIS	Length:		1	
п	XLT46	Width:		£102	
_	ALITO	V cranks: S Cranks:		1102	
	Crank height adjust				
	Standard	Diagonal and vertical crank height adjustment		0	
	PERFORMANCE UPO				
		SRM® Training System	Not available with 3 chainrings or a chainring less than 39 teeth.	Ι	
	XLT60	State of the art measuring tool	Power meter is integrated directly into the cranks.	£2,652	
	WHEELS	State of the art measuring tool	rower meter is integrated directly into the Crafiks.		
	Standard	Threaded axles only	T		
	l .	mireaded axies only		0	
_	Camber	Camber 3°	T		
	XLT142			£68	
	Standard	Camber 9°		0	
	Rear wheels type	T	Mark all and a second of the s	1	
	Standard	26" High Performance clincher wheels	With alloy rims and 14 gauge stainless steel spokes.	0	
ļ <u></u>			26" x 1" High Performance clincher tyre / tube 100 PSI		
	XLT75	26" Top End Carbon rim / stainless spokes	Tubular only - Composite rims - Spokes: 24 front and 20 rear	£1,400	
	XLT78	26" Top End/Spinergy® Carbon rim	Clincher only	£1,327	
	XLT77	Time trial package: Corima disc rear wheels / 26" Corima® AERO	Corima disc front & rear wheels are tubular only	£2,632	
	XLT67	Corima® AERO 26" Carbon rim	Tubular only - With carbon/graphite composite rim and stainless ovalized spokes	£2,334	
	Tyres			l.	
	XLT51	Continental® Grand Prix 4000 tyres	Clincher only	£94	
	XLT52	Continental® Sprinter tyres	Tubular only	£87	
	SAFETY AND COMFO			1	
	Standard	Seat and back cushions		<u> </u>	
ļ	Standard	Chain guard		0	
	Standard	Drafting bumper		O	
ļ		Safety flag		0	
	XLT71	Tool and tyre repair kit	Incl. 22 tools in 1, a unique 3 piece design plus tyre patch kit, CO2 tyres inflators, tyre changing tools and tool bag	£58	
	XLT84	Crank width adaptor set	adds 1.5" per set	£17	
	XLT12	Mirror, legrest mount		£21	
	XLT63	Mirror, chainguard mount		£25	
	XLT13	Water bottle & cage		£25	
	XLT28	Backpack hydratation system		£68	
	XLT141	Heart rate monitor		£68	
	XLT141	Cordless computer		£52	
	XLT9	Leg guard attachment		£52	
	XLT15	Helmet	+	£52	
_	Small (6 5/8" - 7			EDZ	
	□ Medium (6 7/8)         □ Large (7 ¼ - 7 5/8)	")		1	
	XLT16	Extra safety flag		£21	
	XLT6	Front safety light		£18	
	XLT7	Rear flashing light		£18	
	XLT33	Alignment gauge		£52	
	XLT40	Cable kit		£26	
	XLT74	Extra steering dampener		£12	
	XLT42	Indoor stationary trainer		£175	
	TER126	Click-strap large	Pad length approx. 12"	£60	
	TER125	Click-strap medium	Pad length approx. 12"	£56	
		up illeulull	II aa iciibai abbiovi to		
	TER124	Click-strap small	Pad length approx. 8"	£53	

_	T	I		
	XLT17	Crutch holder and strap		£87
	XLT68	Amputee leg support (padded)		£58
	RACE4	Wheel bag	f	185
	RACE20	Handcycle travel bag	f	309
	RACE13	Top End bike jersey	i	£64
	□ L			
	□ XL			
	RACE22	Top End t-shirt		£10
	□ L			
	□ XL			
	UPHOLSTERY			
	Standard	Black nylon upholstery and foam standard		O
	UPHI1	Woodland Camouflage		£69
	UPHI2	Digital Desert Camouflage		£91
	FRAME COLOUR		·	
	Contemporary colo	urs		
		Wet black		O
		White snow		O
		Silver metallic		O
		Stealth black		O
	Way cool colours	•	•	
		Royal blue		O
		Midnight blue		O
		Grasshopper green		O
	Too hot colours	·	·	
		Tangerine red		0
		Raspberry red		O
		Grape Madness		O
		Safety yellow		O
		Orange		O
		Bubblegum pink		O
	•	<u> </u>		
	P1	Two colours option		£91
	Fork colour:			
	Frame colour:			
	· · · · · · · · · · · · · · · · · · ·			

# ADDITIONAL INFORMATION & MEASURING GUIDE

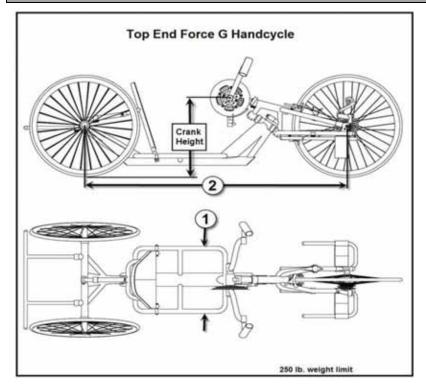





Frame: Ovalized 6061-T6 aluminium aircraft tubing with internal skeletal structure for increased stiffness

Removable fork: 6061-T6 aluminium, super stiff with adjustable crank housing

Frame design: recumbent 3 piece centreline frame construction with welded seat and adjustable back angle

Overall length: 86" (approx. 2.18 m)

Turning radius: 18 feet for 360° circle, 12 feet with one backing manoeuvre

Static tip angle: 39° for 250 lb/113Kg subject Transfer seat height: 8" with 2" cushion (standard)

Backrest: adjustable fore and aft

Back angle: adjustable angle back of 55°-90°

Propulsion system: features a combination of Shimano and Top End components, 27 speeds, 48-39-24 chain rings and 11/34 cassette as standard. The 11/34 cassette is operated by the Hands-On Rapid Fire unit which is mounted on the right (standard) hand pedal. It operates both the 11/34 cassette and the hands-on brake. A shifter/derailleur mounted on upper crank operates the top chain rings utilizing a system which minimizes cables and their maintenance. A parking brake/second brake is mounted on the fork.

Steering: pivot steering and raked fork for controlled turning and stability

Footrest: multi-adjustable fore and aft with straps to securely cradle calves and feet. Straps are 4" wide and feature safety straps for ankles.

Assembly: shipped completely assembled except for rear wheels. Shipping weight is 65-70 lbs/29Kg - 31Kg.

Warranty: 3 year on frame and fork to original owner/limited parts warranty

#### Invacare Ltd: www.invacare.co.uk

### Pencoed Technology Park, Pencoed, Bridgend, CF35 5AQ T: 01656 776222 F: 01656 776220

All rights reserved. Trademarks are identified by the symbols ™ and ®. All trademarks are owned by or licensed to Invacare Corporation unless otherwise noted.

Shimano and Rapid Fire are registered trademarks of Shimano Inc. Spinergy is a registered trademark for Spinergy Corp.

ZIPP is a registered trademark of Compositech, Inc. Cane Creek is a registered trademarj of Cane Creek Cycling components. SRAM is a registered trademark of SRAM Corp.

SRM is a registered trademark of SRM Service Centre Inc. USA. Corima is a registered trademark of Corima SA. Continental is a registered trademark of Continental Corp.

Rotor is a registered trademark of Rotor Components, LLC.

©2011 Invacare Corporation - Form No. 08-036

